


# STEELMAN POWER CAPACITORS

## SPECIFICATION SHEET

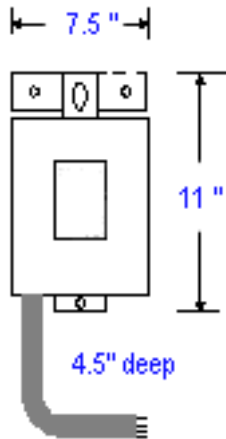

**Life Expectancy:** 20 years  
**Temperature:** -40°C to +50°C  
**Discharge Resistors:** Included, will reduce residual voltage to less than 50 volts in one minute after removal from service.  
**Pressure Sensitive Interrupter** in each capacitor cell.

**Self Clearing Design**

### MODEL M001.0-240-EPT

**1.0 KVAR 240 VOLT Non-Fused**  
**Three Phase 60 Hz Weatherproof Enclosure**  
**Rated Current: 2.4 Amps**  
**Recommended Wire Size: 14 AWG**  
**APPROX. WEIGHT 12 LBS. EACH**

◆ Pigtail- electrical cord ready for connection

#### STEELMAN ADVANTAGE OPTION

480Volt, 70°C rated capacitors

ENHANCES CAPACITOR  
LIFE & PERFORMANCE  
CHARACTERISTICS

Enclosures are rated Outdoor/Indoor.  
Provisions for wall and pole mount are included.



## TWO YEAR LIMITED WARRANTY!

**STEELMAN INDUSTRIES, INC.**

2800 HWY. 135 N      P.O. BOX 1461      KILGORE, TEXAS 75662

PHONE: (903) 984-3061      FAX: (903) 984-1384