

# STEELMAN POWER CAPACITORS SPECIFICATION SHEET

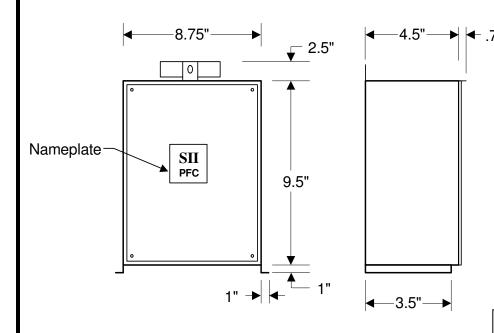



**MODEL M004.0-480-NF** 

4 KVAR 480 VOLT Non Fused

Three Phase 60 Hz NEMA 3R Enclosure

**Rated Current: 4.8 Amps** 

Recommended Wire Size: 14 AWG APPROX. WEIGHT 13 LBS. EACH

#### **OPTIONS:**

\*Pigtail- 5' electrical cord ready

for connection

\*Built-In Contactor

Enclosures are rated NEMA 3R, Outdoor/Indoor. Provisions for wall, pole, or floor mounting are included.

## TWO YEAR LIMITED WARRANTY!

**Life Expectancy:** 20 years **Temperature:** -40°C to +50°C **Discharge Resistors:** Included, will reduce residual voltage to less than 50 volts in one minute after removal from service.

Pressure Sensitive Interrupter in each capacitor cell.

**Self Clearing Design** 

### STEELMAN ADVANTAGE OPTION

600Volt, 70°C rated capacitors

ENHANCES CAPACITOR LIFE & PERFORMANCE CHARACTERISTICS



## STEELMAN INDUSTRIES, INC.

2800 HWY. 135 N P.O. BOX 1461 KILGORE, TEXAS 75662

PHONE: (903) 984-3061 FAX: (903) 984-1384