


STEELMAN POWER CAPACITORS SPECIFICATION SHEET

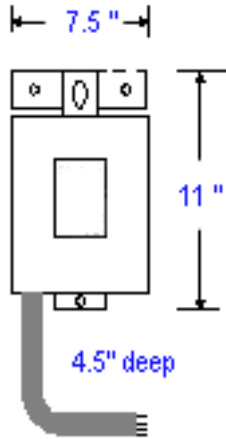

Life Expectancy: 20 years
Temperature: -40°C to +50°C
Discharge Resistors: Included, will reduce residual voltage to less than 50 volts in one minute after removal from service.
Pressure Sensitive Interrupter in each capacitor cell.

Self Clearing Design

MODEL M006.0-240-EPT

**6.0 KVAR 240 VOLT Non-Fused
Three Phase 60 Hz Weatherproof Enclosure
Rated Current: 14.4 Amps
Recommended Wire Size: 10 AWG
APPROX. WEIGHT 17 LBS. EACH**

STEELMAN ADVANTAGE OPTION

480Volt, 70°C rated capacitors

**ENHANCES CAPACITOR
LIFE & PERFORMANCE
CHARACTERISTICS**

◆ Pigtail- electrical cord ready for connection

Enclosures are rated Outdoor/Indoor.
Provisions for wall and pole mount are included.



TWO YEAR LIMITED WARRANTY!

STEELMAN INDUSTRIES, INC.

2800 HWY. 135 N P.O. BOX 1461 KILGORE, TEXAS 75662
PHONE: (903) 984-3061 FAX: (903) 984-1384