



# STEELMAN POWER CAPACITORS SPECIFICATION SHEET

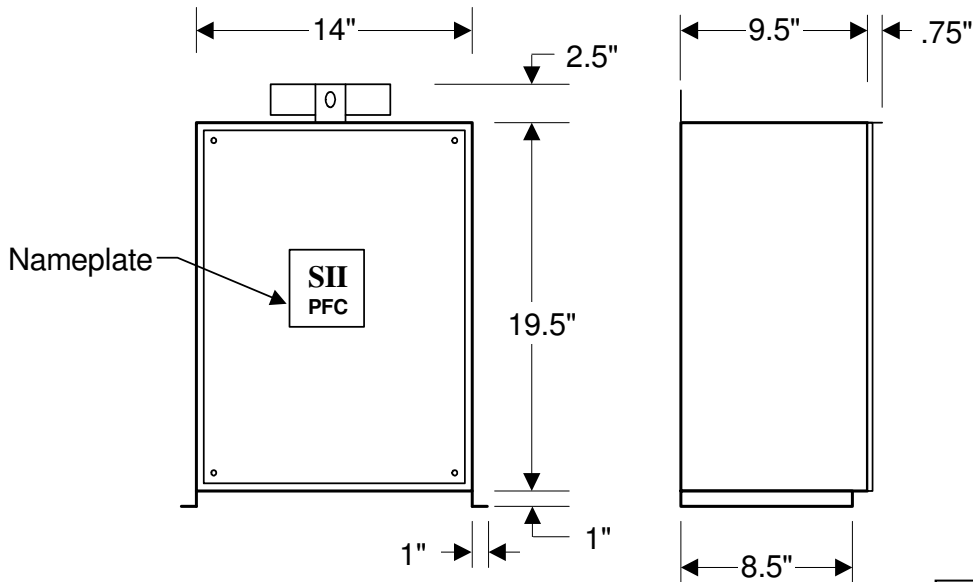

## Internal Wiring Diagram

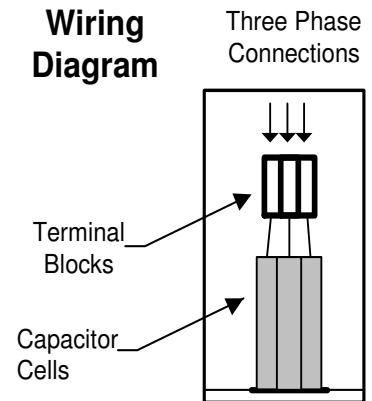

**MODEL M020.0-240-NF**  
**20 KVAR 240VOLT Non-Fused**  
**Three Phase 60 Hz NEMA 3R Enclosure**  
**Rated Current: 48.1 Amps**  
**Recommended Wire Size: 6 AWG**  
**APPROX. WEIGHT 53 LBS. EACH**

### OPTIONS:

- ◆ Built-In Contactor
- ◆ Built-In Circuit Breaker
- ◆ Third Leg Fusing

**Life Expectancy: 20 years**  
**Temperature: -40°C to +50°C**  
**Discharge Resistors: Included, will reduce residual voltage to less than 50 volts in one minute after removal from service.**  
**Pressure Sensitive Interrupter in each capacitor cell.**

**Self Clearing Design**

Enclosures are rated NEMA 3R, Outdoor/Indoor.  
 Provisions for wall, pole, or floor mounting are included.

### STEELMAN ADVANTAGE OPTION

480Volt, 70°C rated capacitors

**ENHANCES CAPACITOR  
LIFE & PERFORMANCE  
CHARACTERISTICS**

**TWO YEAR LIMITED WARRANTY!**



**STEELMAN INDUSTRIES, INC.**

2706 HWY. 135 N P.O. BOX 1461 KILGORE, TEXAS 75662  
 PHONE: (903) 984-3061 FAX: (903) 984-1384