
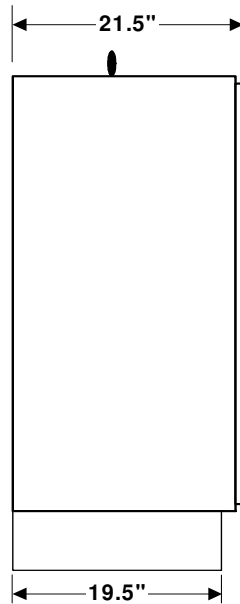


# STEELMAN POWER CAPACITORS SPECIFICATION SHEET

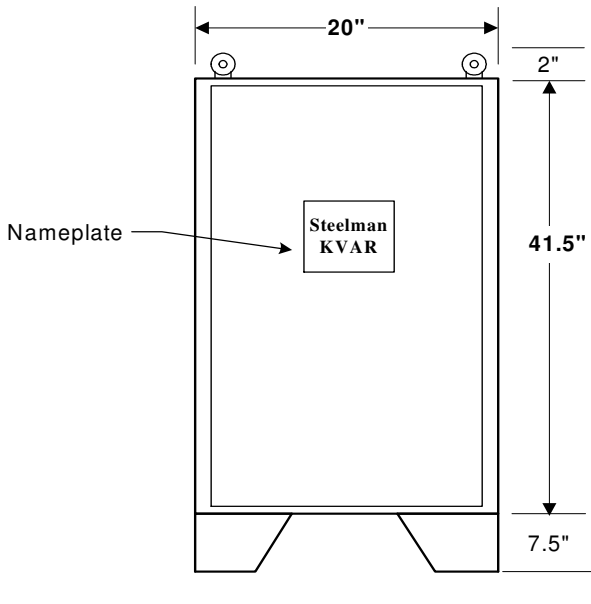

**Life Expectancy:** 20 years  
**Temperature:** -40°C to +50°C  
**Discharge Resistors:** Included, will reduce residual voltage to less than 50 volts in one minute after removal from service.  
**Pressure Sensitive Interrupter in each capacitor cell.**


**Self Clearing Design**

**Internal  
Wiring  
Diagram**

**Three Phase  
Connections**

Terminal  
Block

Capacitor  
Cells



**MODEL M200.0-480-NF**  
**200 KVAR 480 VOLT Non Fused**  
**Three Phase 60 Hz NEMA 1 Enclosure**  
**Rated Current: 240.6 Amps**  
**Recommended Wire Size: 400 MCM CU.**  
**APPROX. WEIGHT 200 LBS. EACH**

Enclosures are rated NEMA 1, Indoor. Designed to be floor mounted. Lifting eye bolts on all Pad-Mount Units. Electrical Connections should be made through the top right.



**OPTIONS:**

- ◆ 3<sup>rd</sup> Leg Fusing
- ◆ Built-In Circuit Breaker
- ◆ NEMA 3R Outdoor Enclosure

**STEELMAN ADVANTAGE  
OPTION**

600Volt, 70°C rated capacitors

**ENHANCES CAPACITOR  
LIFE & PERFORMANCE  
CHARACTERISTICS**

**TWO YEAR LIMITED WARRANTY!**

**STEELMAN INDUSTRIES, INC.**

2800 HWY. 135 N P.O. BOX 1461 KILGORE, TEXAS 75662  
 PHONE: (903) 984-3061 FAX: (903) 984-1384