
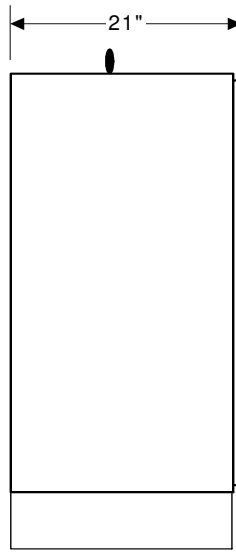


# STEELMAN POWER CAPACITORS SPECIFICATION SHEET

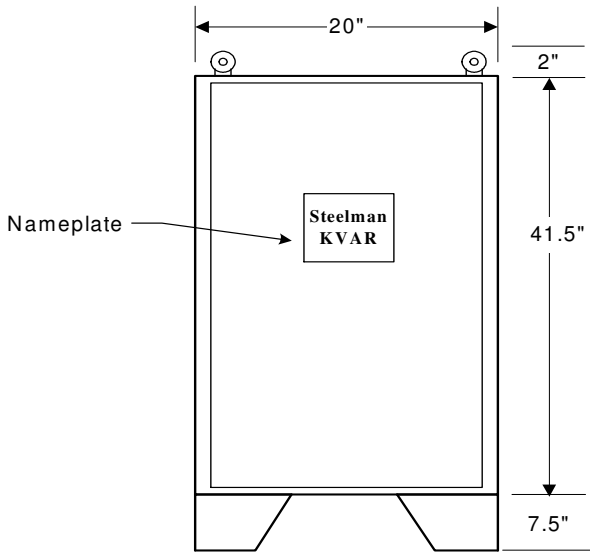


**Life Expectancy:** 20 years  
**Temperature:** -40°C to +50°C  
**Discharge Resistors:** Included, will reduce residual voltage to less than 50 volts in one minute after removal from service.

**Pressure Sensitive Interrupter in each capacitor cell.**

**Self Clearing Design**

## Internal Wiring Diagram

Three Phase Connections

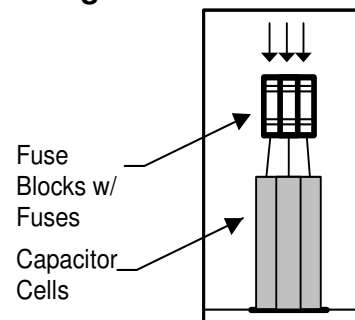

**MODEL M250.0-480-F**  
**300 KVAR 480 VOLT Fused**  
**Three Phase 60 Hz NEMA 1 Enclosure**  
**Rated Current: 300 Amps**  
**Recommended Wire Size: (2) 4/0 CU. per phase**  
**APPROX. WEIGHT 240 LBS. EACH**

Enclosures are rated NEMA 1, Indoor. Designed to be floor mounted. Lifting eye bolts on all Pad-Mount Units.



### OPTIONS:

- ◆ 3<sup>rd</sup> Leg Fusing
- ◆ Built-In Circuit Breaker
- ◆ NEMA 3R Outdoor Enclosure

### STEELMAN ADVANTAGE OPTION

600Volt, 70°C rated capacitors

ENHANCES CAPACITOR  
LIFE & PERFORMANCE  
CHARACTERISTICS

**TWO YEAR LIMITED WARRANTY!**

**STEELMAN INDUSTRIES, INC.**

2706 HWY. 135 N P.O. BOX 1461 KILGORE, TEXAS 75662

PHONE: (903) 984-3061 FAX: (903) 984-1384