



STEELMAN POWER CAPACITORS SPECIFICATION SHEET

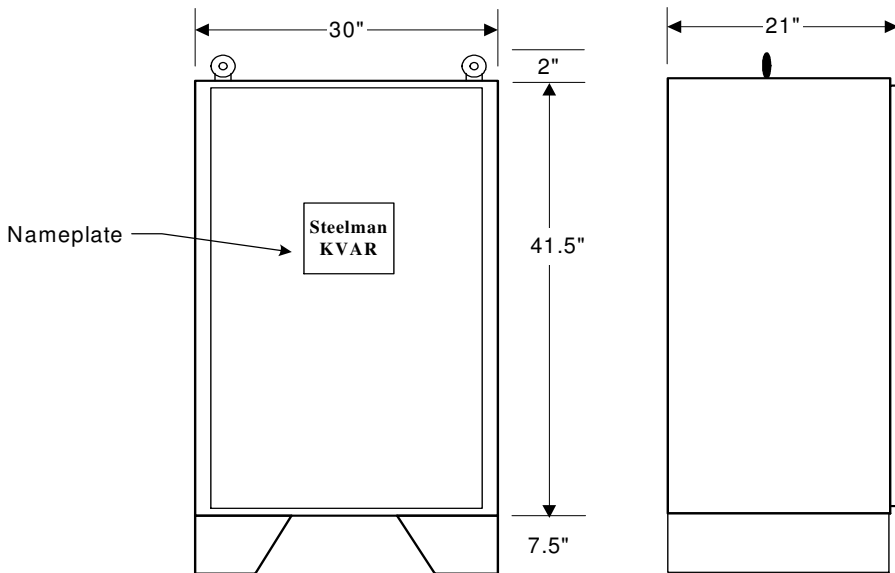

Life Expectancy: 20 years
Temperature: -40°C to +50°C
Discharge Resistors: Included, will reduce residual voltage to less than 50 volts in one minute after removal from service.
Pressure Sensitive Interrupter in each capacitor cell.
Self Clearing Design

Internal Wiring Diagram

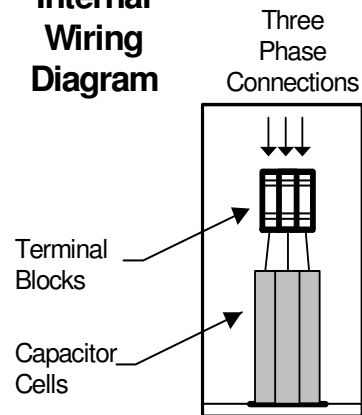

MODEL M300-480-NF
300 KVAR 480 VOLT Non Fused
Three Phase 60 Hz NEMA 1 Enclosure
Rated Current: 360 Amps
Recommended Wire Size: (2) 250 MCM CU. per phase
APPROX. WEIGHT 280 LBS. EACH

Enclosures are rated NEMA 1, Indoor. Designed to be floor mounted. Lifting eye bolts on all Pad-Mount Units. Electrical Connections should be made through top right.

OPTIONS:

- ◆ 3rd Leg Fusing
- ◆ Built-In Circuit Breaker
- ◆ NEMA 3R Outdoor Enclosure

STEELMAN ADVANTAGE OPTION

600Volt, 70°C rated capacitors

ENHANCES CAPACITOR
LIFE & PERFORMANCE
CHARACTERISTICS

TWO YEAR LIMITED WARRANTY!

STEELMAN INDUSTRIES, INC.

2800 HWY. 135 N P.O. BOX 1461 KILGORE, TEXAS 75662
PHONE: (903) 984-3061 FAX: (903) 984-1384