




Steelman Industries, Inc.

P.O. BOX 1461 2800 Hwy. 135 Kilgore, Texas 75662

PH# (903) 984-3061
FAX# (903) 984-1384

Application



H-A-S
Rotary Phase Converter
Converts
Single Phase Power
Into
Three Phase Power



ODP MODEL

R-10/20-230-LD

TEFC MODEL

R-10/20-230-LD/TEFC

Measurements & Specifications

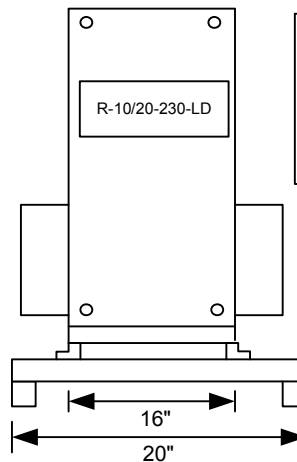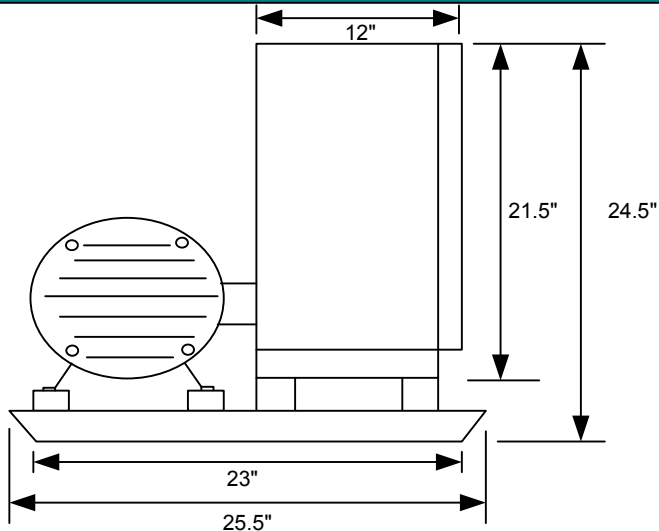

Weight: 260 lbs. ODP, 340 lbs. TEFC

Enclosure Size/Type: 2/ NEMA 3R

Base Size: 3

***Assembled, Tested, and
mounted on steel base
ready for installation.**

Electrical Specifications & Service Requirements

Voltage Input: 230

Voltage Output: 230

Max. Single Phase Current Input: 108 A

Idle Current: 10 A


Inrush Current: 260A

Largest Motor Starting Capacity: 10HP

Total Running Horse Power Capacity: 20HP

Note: The convertor should not run for long periods of time with no load.

150A Disconnect Switch
1/0 Wire (Recommended)



Capacitor Section