




Steelman Industries, Inc.

P.O. BOX 1461 2800 Hwy. 135 Kilgore, Texas 75662

PH# (903) 984-3061

FAX# (903) 984-1384

Application



H-A-S
Rotary Phase Converter
 Converts
 Single Phase Power
 Into
 Three Phase Power

Model Numbers



ODP MODEL

R-15/30-230-LD

TEFC MODEL

R-15/30-230-LD/TEFC

Measurements & Specifications

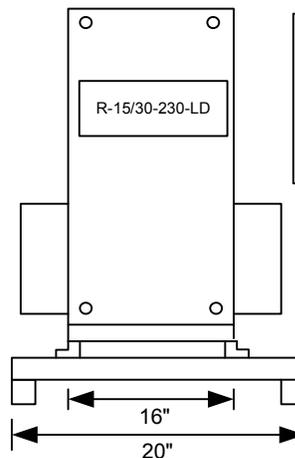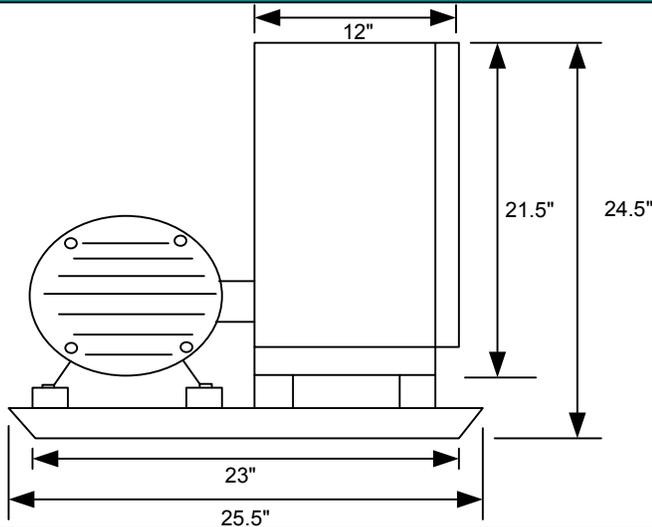

Weight: 275 lbs.ODP, 350 TEFC

Enclosure Size/Type: 2/ NEMA 3R

Base Size: 3

*Assembled, Tested, and mounted on steel base ready for installation.

Electrical Specifications & Service Requirements

Voltage Input: 230

Voltage Output: 230

Max. Single Phase Current Input: 160 A

Idle Current: 10 A

Inrush Current: 260A

Largest Motor Starting Capacity:15HP

Total Running Horse Power Capacity: 30HP

Note: Converter should not run for long periods of time with no load.

200A Disconnect Switch
 2/0 Wire (Recommended)

