




Steelman Industries, Inc.

P.O. BOX 1461 2800 Hwy. 135 Kilgore, Texas 75662

PH# (903) 984-3061

FAX# (903) 984-1384

Application



H-A-S
Rotary Phase Converter
Converts
Single Phase Power
Into
Three Phase Power

Model Numbers



ODP MODEL

R-20/40-230-LD

TEFC MODEL

R-20/40-230-LD/TEFC

Measurements & Specifications

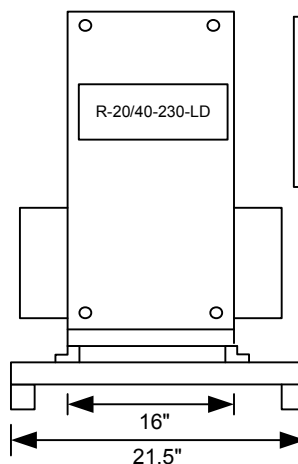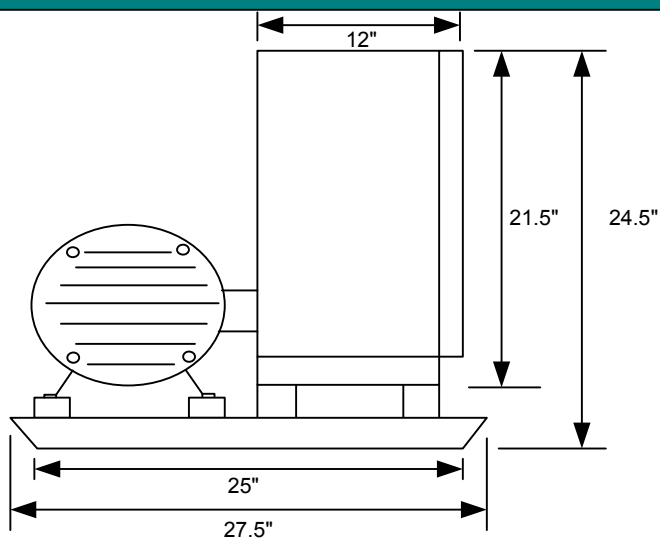

Weight: 360 lbs. ODP, TEFC 475

Enclosure Size/Type: 2/ NEMA 3R

Base Size: 4

***Assembled, Tested, and mounted on steel base ready for installation.**

Electrical Specifications & Service Requirements

Voltage Input: 230

Voltage Output: 230

Max. Single Phase Current Input: 208 A

Idle Current: 14 A

Inrush Current: 360A

Largest Motor Starting Capacity: 20HP

Total Running Horse Power Capacity: 40HP

Note: Converter should not run for long periods of time with no load.

250A Disconnect Switch
3/0 Wire (Recommended)

