




Steelman Industries, Inc.

P.O. BOX 1461 2800 Hwy. 135 Kilgore, Texas 75662

PH# (903) 984-3061

FAX# (903) 984-1384

Application



H-A-S
Rotary Phase Convertor
 Converts
 Single Phase Power
 Into
 Three Phase Power

Model Numbers

ODP MODEL

R-40/80-230-LD



TEFC MODEL

R-40/80-230-LD/TEFC

Measurements & Specifications

ODP MODEL

See note for TEFC dimensions.

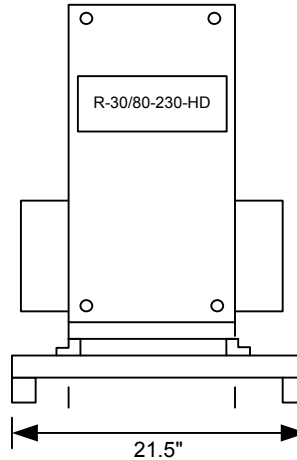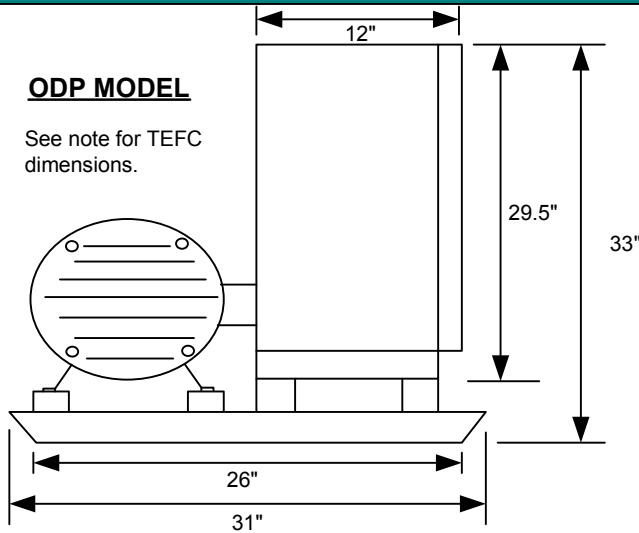

Weight: ODP Model - 560 lbs.
 TEFC Model - 820 lbs.

Note:
 The TEFC model is a two piece unit
 One section is 24.5"H x 26"W x 20"D and the other section is 24.5"H x 28"W x 21.5"D

*Assembled, Tested, and mounted on steel base ready for installation.

Electrical Specifications & Service Requirements

Voltage Input: 230

Voltage Output: 230

Max. Single Phase Current Input: 400 A


Idle Current: 14 A

Inrush Current: 560A

Largest Motor Starting Capacity: 40HP

Total Running Horse Power Capacity: 80HP

500A Disconnect Switch
 (2) 350 MCM Wire (Recommended)

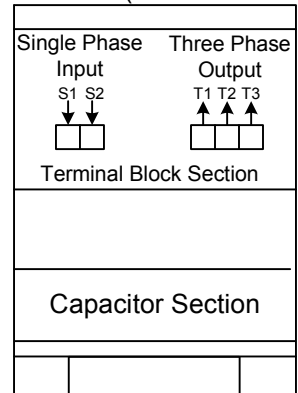

Note: Convertor should not run for long periods of time with no load