




Steelman Industries, Inc.

P.O. BOX 1461 2800 Hwy. 135 Kilgore, Texas 75662

PH# (903) 984-3061

FAX# (903) 984-1384

Application



H-A-S
Rotary Phase Converter
Converts
Single Phase Power
Into
Three Phase Power

Model Numbers



ODP MODEL

R-40/80-460-LD

TEFC MODEL (2 Piece unit)

R-40/80-460-LD/TEFC

Measurements & Specifications

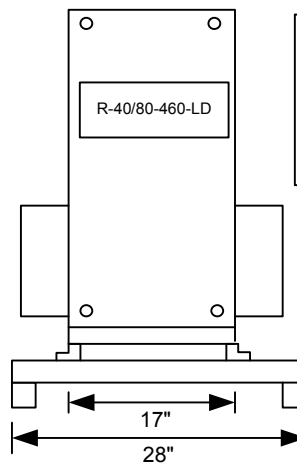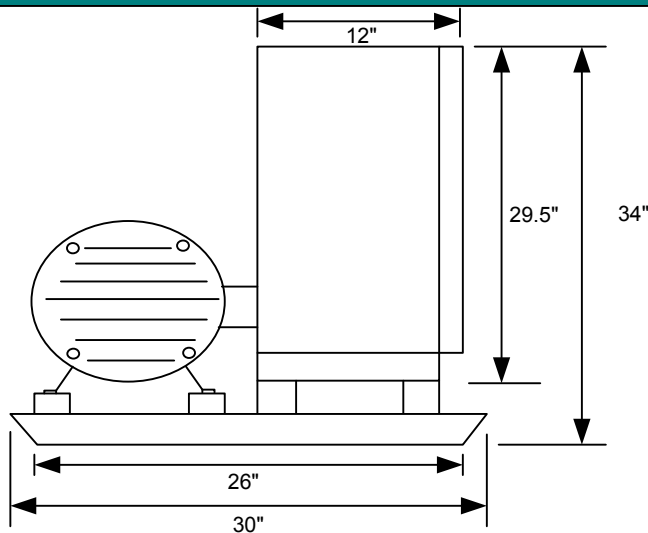

Weight: 560 lbs.

Enclosure Size/Type: 3/ NEMA 3R

Base Size: 5

***Assembled, Tested, and mounted on steel base ready for installation.**

Electrical Specifications & Service Requirements

Voltage Input: 460

Voltage Output: 460

Max. Single Phase Current Input: 200 A

Idle Current: 13.5 A

Inrush Current: 220A

Largest Motor Starting Capacity: 40HP

Total Running Horse Power Capacity: 80HP

250A Disconnect Switch
250 MCM Wire (Recommended)

