



# STEELMAN POWER CAPACITORS

## SPECIFICATION SHEET

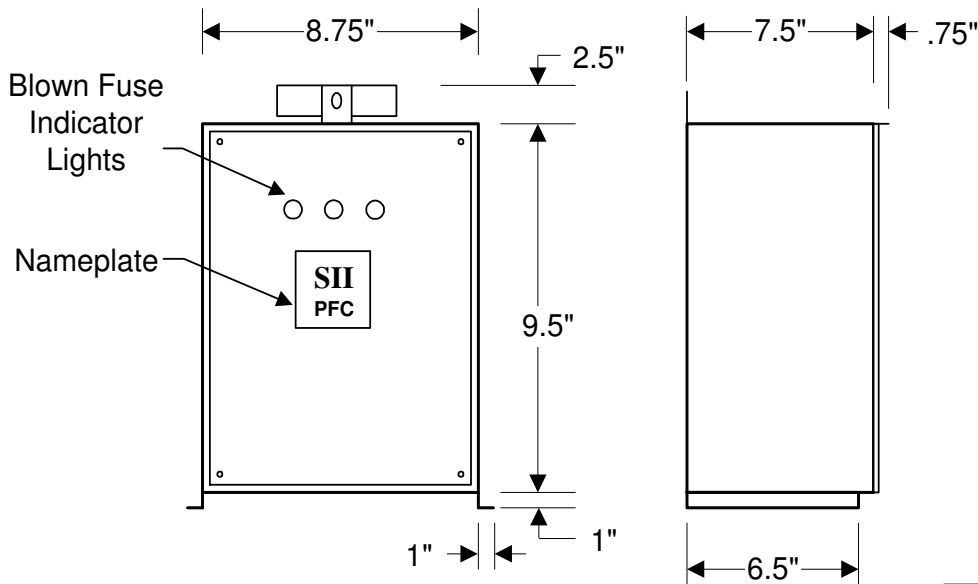

### Internal Wiring Diagram

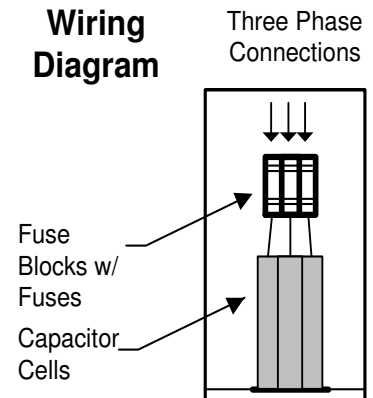

### MODEL M006.0-240-FPL

**6 KVAR 240 VOLT Fused with pilot lights**

**Three Phase 60 Hz NEMA 3R Enclosure**

**Rated Current: 14.4 Amps**

**Recommended Wire Size: 10 AWG**

**APPROX. WEIGHT 17 LBS. EACH**

**Life Expectancy: 20 years**

**Temperature: -40°C to +50°C**

**Discharge Resistors:** Included, will reduce residual voltage to less than 50 volts in one minute after removal from service.

**Pressure Sensitive Interrupter in each capacitor cell.**

**Self Clearing Design**

### OPTIONS:

- \*Pigtail- 5' electrical cord ready for connection
- \*Built-In Contactor

Enclosures are rated NEMA 3R, Outdoor/Indoor.  
Provisions for wall, pole, or floor mounting are included.

### STEELMAN ADVANTAGE OPTION

480Volt, 70°C rated capacitors

ENHANCES CAPACITOR  
LIFE & PERFORMANCE  
CHARACTERISTICS

**TWO YEAR LIMITED WARRANTY!**



**STEELMAN INDUSTRIES, INC.**

2706 HWY. 135 N P.O. BOX 1461 KILGORE, TEXAS 75662

PHONE: (903) 984-3061 FAX: (903) 984-1384