


# STEELMAN POWER CAPACITORS SPECIFICATION SHEET

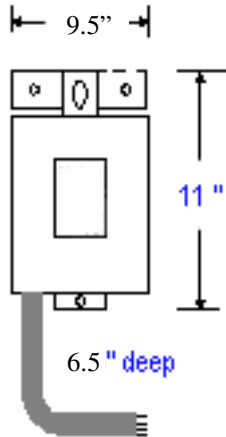

**Life Expectancy:** 20 years  
**Temperature:** -40°C to +50°C  
**Discharge Resistors:** Included, will reduce residual voltage to less than 50 volts in one minute after removal from service.  
**Pressure Sensitive Interrupter in each capacitor cell.**

**Self Clearing Design**

## MODEL M018.0-480-EPT

**18.0 KVAR 480 VOLT Non-Fused  
Three Phase 60 Hz Weatherproof Enclosure  
Rated Current: 21.7 Amps  
Recommended Wire Size: 8 AWG  
APPROX. WEIGHT 25 LBS. EACH**

### STEELMAN ADVANTAGE OPTION

600Volt, 70°C rated capacitors

ENHANCES CAPACITOR  
LIFE & PERFORMANCE  
CHARACTERISTICS

◆ Pigtail- electrical cord ready for connection

Enclosures are rated Outdoor/Indoor.  
Provisions for wall and pole mount are included.



**TWO YEAR LIMITED WARRANTY!**

**STEELMAN INDUSTRIES, INC.**

2800 HWY. 135 N      P.O. BOX 1461      KILGORE, TEXAS 75662  
PHONE: (903) 984-3061      FAX: (903) 984-1384