



# STEELMAN POWER CAPACITORS

## SPECIFICATION SHEET

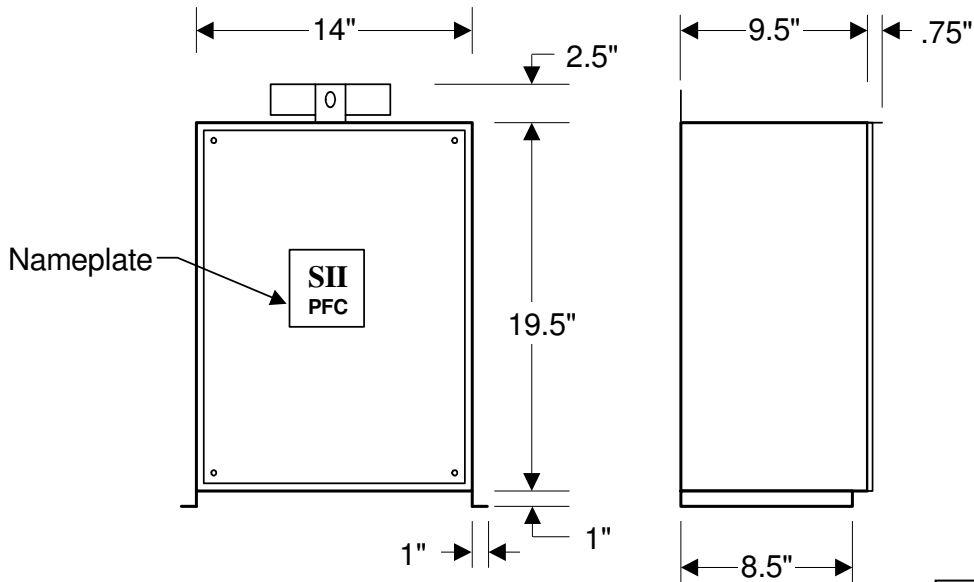

**Internal Wiring Diagram**

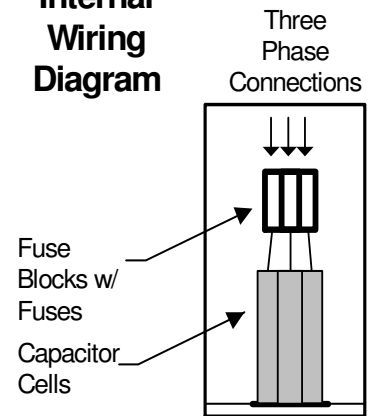

**MODEL M025.0-240-F**  
**25 KVAR 240VOLT Fused**  
**Three Phase 60 Hz NEMA 3R Enclosure**  
**Rated Current: 60.1 Amps**  
**Recommended Wire Size: 4 AWG**  
**APPROX. WEIGHT 56 LBS. EACH**

**OPTIONS:**

- ◆ Built-In Contactor
- ◆ Built-In Circuit Breaker
- ◆ Third Leg Fusing

**Life Expectancy: 20 years**

**Temperature: -40°C to +50°C**

**Discharge Resistors:** Included, will reduce residual voltage to less than 50 volts in one minute after removal from service.

**Pressure Sensitive Interrupter in each capacitor cell.**

**Self Clearing Design**

Enclosures are rated NEMA 3R, Outdoor/Indoor.  
Provisions for wall, pole, or floor mounting are included.

**STEELMAN ADVANTAGE**  
**OPTION**

480Volt, 70°C rated capacitors

**ENHANCES CAPACITOR  
LIFE & PERFORMANCE  
CHARACTERISTICS**

**TWO YEAR LIMITED WARRANTY!**



**STEELMAN INDUSTRIES, INC.**

2706 HWY. 135 N P.O. BOX 1461 KILGORE, TEXAS 75662

PHONE: (903) 984-3061 FAX: (903) 984-1384