



# STEELMAN POWER CAPACITORS

## SPECIFICATION SHEET

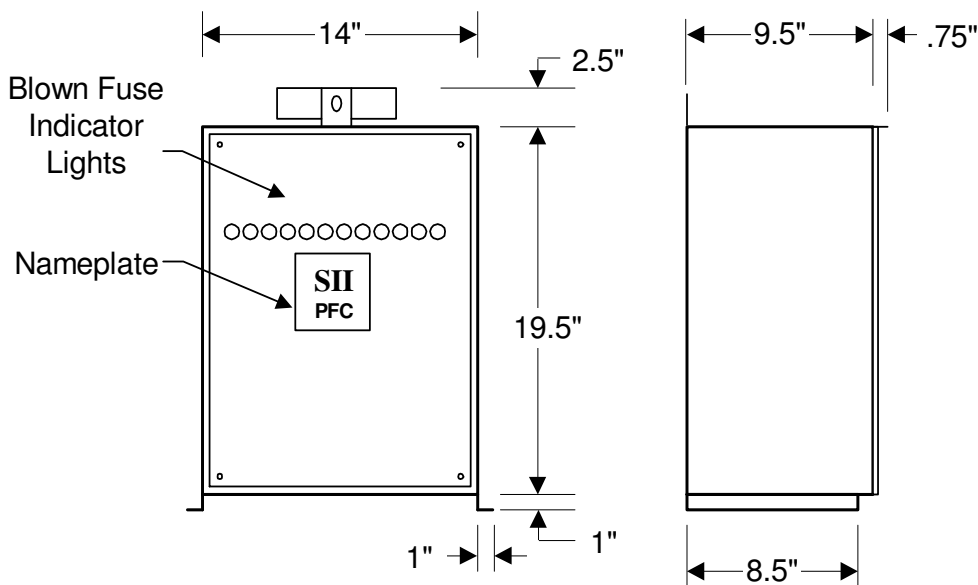

**Internal Wiring Diagram**

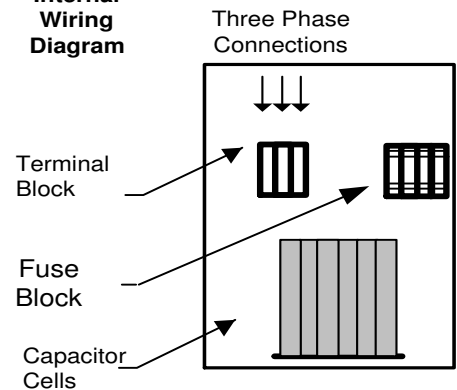

### MODEL M060.0-480-FPL

**60 KVAR 480 VOLT Fused with pilot lights**

**Three Phase 60 Hz NEMA 3R Enclosure**

**Rated Current: 72.2 Amps**

**Recommended Wire Size: 3 AWG**

**APPROX. WEIGHT 56 LBS. EACH**

#### OPTIONS:

- ◆ Built-In Contactor
- ◆ 3<sup>rd</sup> Leg Fusing
- ◆ Built-In Circuit Breaker

Enclosures are rated NEMA 3R, Outdoor/Indoor.  
Provisions for wall, pole, or floor mounting are included.

**Life Expectancy: 20 years**

**Temperature: -40°C to +50°C**

**Discharge Resistors:** Included, will reduce residual voltage to less than 50 volts in one minute after removal from service.

**Pressure Sensitive Interrupter in each capacitor cell.**

**Self Clearing Design**

#### STEELMAN ADVANTAGE OPTION

600Volt, 70°C rated capacitors

ENHANCES CAPACITOR  
LIFE & PERFORMANCE  
CHARACTERISTICS

**TWO YEAR LIMITED WARRANTY!**



**STEELMAN INDUSTRIES, INC.**

2800 HWY. 135 N P.O. BOX 1461 KILGORE, TEXAS 75662

PHONE: (903) 984-3061 FAX: (903) 984-1384