


# STEELMAN POWER CAPACITORS

## SPECIFICATION SHEET

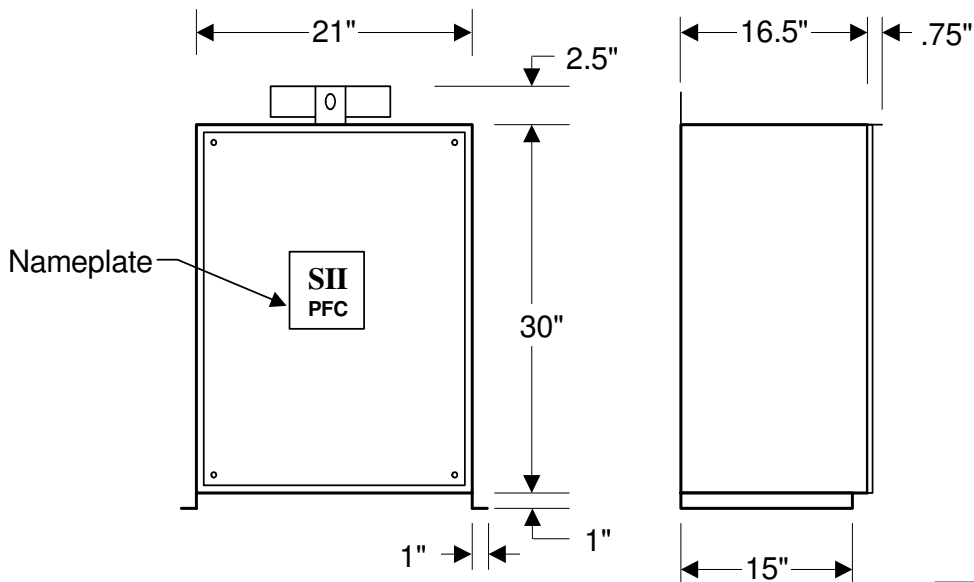


**Internal Wiring Diagram**

Terminal Block

Fuse Block

Capacitor Cells

Three Phase Connections



**MODEL M075.0-240-F**  
**75 KVAR 240 VOLT Fused**  
**Three Phase 60 Hz NEMA 3R Enclosure**  
**Rated Current: 180.4 Amps**  
**Recommended Wire Size: 250 MCM**  
**APPROX. WEIGHT 140 LBS. EACH**

### AVAILABLE OPTIONS:

- ◆ 3<sup>rd</sup> Leg Fusing
- ◆ Built-In Circuit Breaker

**Note: dimensions may change with added options.**

Enclosures are rated NEMA 3R, Outdoor/Indoor.  
 Provisions for wall, pole, or floor mounting are included.

**Life Expectancy: 20 years**

**Temperature: -40°C to +50°C**

**Discharge Resistors:** Included, will reduce residual voltage to less than 50 volts in one minute after removal from service.

**Pressure Sensitive Interrupter in each capacitor cell.**

**Self Clearing Design**

### STEELMAN ADVANTAGE OPTION

480Volt, 70°C rated capacitors

**ENHANCES CAPACITOR  
LIFE & PERFORMANCE  
CHARACTERISTICS**

**TWO YEAR LIMITED WARRANTY!**



**STEELMAN INDUSTRIES, INC.**

2800 HWY. 135 N P.O. BOX 1461 KILGORE, TEXAS 75662

PHONE: (903) 984-3061

FAX: (903) 984-1384