


STEELMAN POWER CAPACITORS

SPECIFICATION SHEET

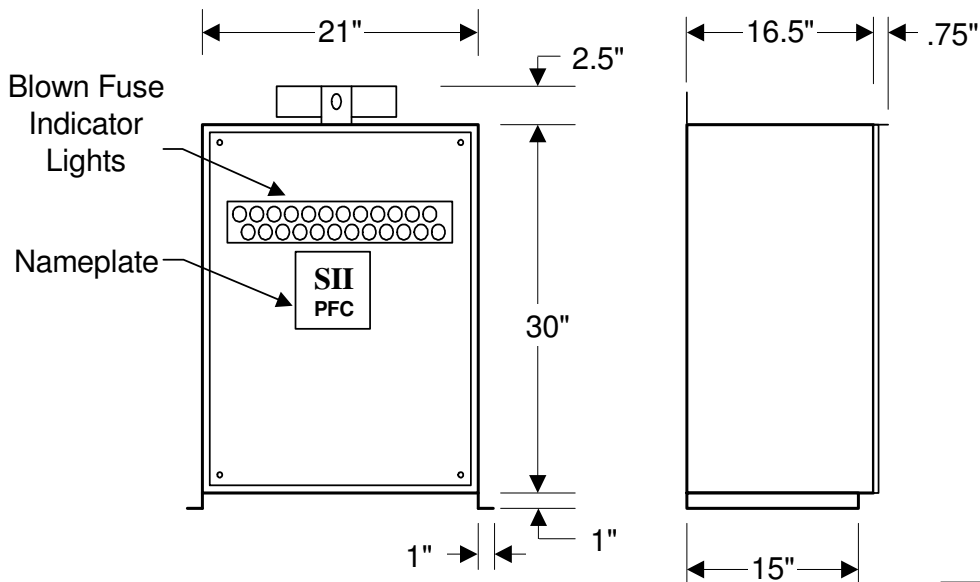


Internal Wiring Diagram

Terminal Block

Fuse Block

Capacitor Cells

Three Phase Connections



MODEL M075.0-240-FPL

75 KVAR 240 VOLT Fused with pilot lights

Three Phase 60 Hz NEMA 3R Enclosure

Rated Current: 180.4 Amps

Recommended Wire Size: 250 MCM

APPROX. WEIGHT 140 LBS. EACH

AVAILABLE OPTIONS:

- ◆ 3rd Leg Fusing
- ◆ Built-In Circuit Breaker

Note: dimensions may change with added options.

Enclosures are rated NEMA 3R, Outdoor/Indoor.
Provisions for wall, pole, or floor mounting are included.

Life Expectancy: 20 years

Temperature: -40°C to +50°C

Discharge Resistors: Included, will reduce residual voltage to less than 50 volts in one minute after removal from service.

Pressure Sensitive Interrupter in each capacitor cell.

Self Clearing Design

STEELMAN ADVANTAGE OPTION

480Volt, 70°C rated capacitors

**ENHANCES CAPACITOR
LIFE & PERFORMANCE
CHARACTERISTICS**

TWO YEAR LIMITED WARRANTY!



STEELMAN INDUSTRIES, INC.

2800 HWY. 135 N P.O. BOX 1461 KILGORE, TEXAS 75662

PHONE: (903) 984-3061

FAX: (903) 984-1384