



STEELMAN POWER CAPACITORS SPECIFICATION SHEET

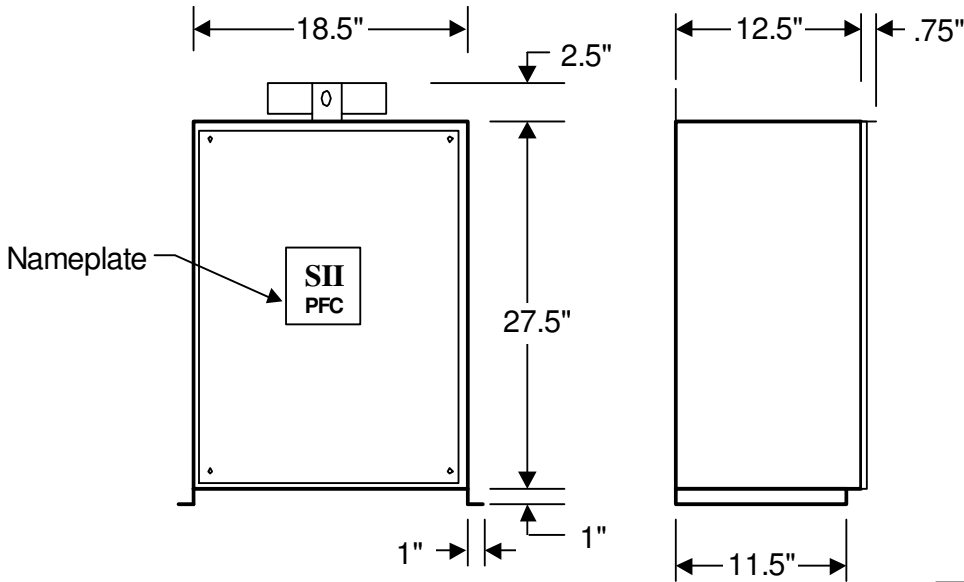

**Internal
Wiring
Diagram**

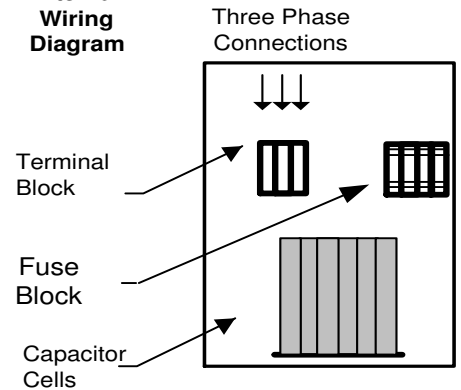

MODEL M090.0-480-F
90 KVAR 480 VOLT Fused
Three Phase 60 Hz NEMA 3R Enclosure
Rated Current: 108.3 Amps
Recommended Wire Size: 1/0 AWG
APPROX. WEIGHT 82 LBS. EACH

Life Expectancy: 20 years
Temperature: -40°C to +50°C
Discharge Resistors: Included, will
 reduce residual voltage to less than
 50 volts in one minute after removal
 from service.
Pressure Sensitive Interrupter in
each capacitor cell.

Self Clearing Design

AVAILABLE OPTIONS:

- ◆ Built-In Contactor
- ◆ Built-In Circuit Breaker

**Note: dimensions may change with
added options.**

**STEELMAN ADVANTAGE
OPTION**

600Volt, 70°C rated capacitors

**ENHANCES CAPACITOR
LIFE & PERFORMANCE
CHARACTERISTICS**

Enclosures are rated NEMA 3R, Outdoor/Indoor.
Provisions for wall, pole, or floor mounting are included.

TWO YEAR LIMITED WARRANTY!



STEELMAN INDUSTRIES, INC.

2800 HWY. 135 N P.O. BOX 1461 KILGORE, TEXAS 75662
 PHONE: (903) 984-3061 FAX: (903) 984-1384