
STEELMAN POWER CAPACITORS SPECIFICATION SHEET

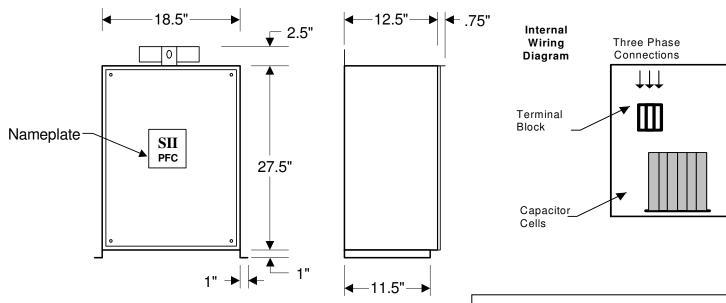

MODEL M040.0-240-NF 40 KVAR 240 VOLT Non Fused Three Phase 60 Hz NEMA 3R Enclosure Rated Current: 96.2 Amps Recommended Wire Size: 1 AWG

Recommended Wire Size: 1 AWG APPROX. WEIGHT 78 LBS. EACH

AVAILABLE OPTIONS:

- **♦** Built-In Contactor
- ◆ Built-In Circuit Breaker

Note: dimensions may change with added options.

Enclosures are rated NEMA 3R, Outdoor/Indoor. Provisions for wall, pole, or floor mounting are included.

TWO YEAR LIMITED WARRANTY!

Life Expectancy: 20 years **Temperature:** -40°C to +50°C **Discharge Resistors:** Included, will reduce residual voltage to less than 50 volts in one minute after removal from service.

Pressure Sensitive Interrupter in each capacitor cell.

Self Clearing Design

STEELMAN ADVANTAGE OPTION

480Volt, 70°C rated capacitors

ENHANCES CAPACITOR LIFE & PERFORMANCE CHARACTERISTICS



STEELMAN INDUSTRIES, INC.

2800 HWY. 135 N P.O. BOX 1461 KILGORE, TEXAS 75662

PHONE: (903) 984-3061 FAX: (903) 984-1384

m040.0-240-nf Tuesday, June 16, 2015